


Item (1)  
 High Pressure Pimp  
 Model : HXM-15.07EM  
 Flow rate : 15.5 liter/min @ 70 bar  
 Power Supply : 230 VAC / 1 phase / 50 Hz with 20 amp isolator

Item (2)  
 Fog Nozzle  
 Model : RI-50  
 Flow rate : 0.56 liter/min @ 70 bar  
 Spray angle : 90 degrees Fog  
 Total 27 qty = 15.0 liter/min @ 70 bar

ITEM	PART NUMBER	DESCRIPTION	QTY
(1)	HXM-15.07EM	High Pressure Pump	01
(2)	RI-50	Ruby Insert Fog Nozzle	27
(3)	SS Tubings	3/8" OD with 9 FNPT sprocket	03
(4)	Filter	3 stage 5 microns filter	01
(5)	One Way valve	3/8" OD SS check valve	03
(6)	SS Tubing	3/8" OD Seamless 6 m	05
(7)	SS Compression	double ferrule fittings 3/8" OD	1 lot

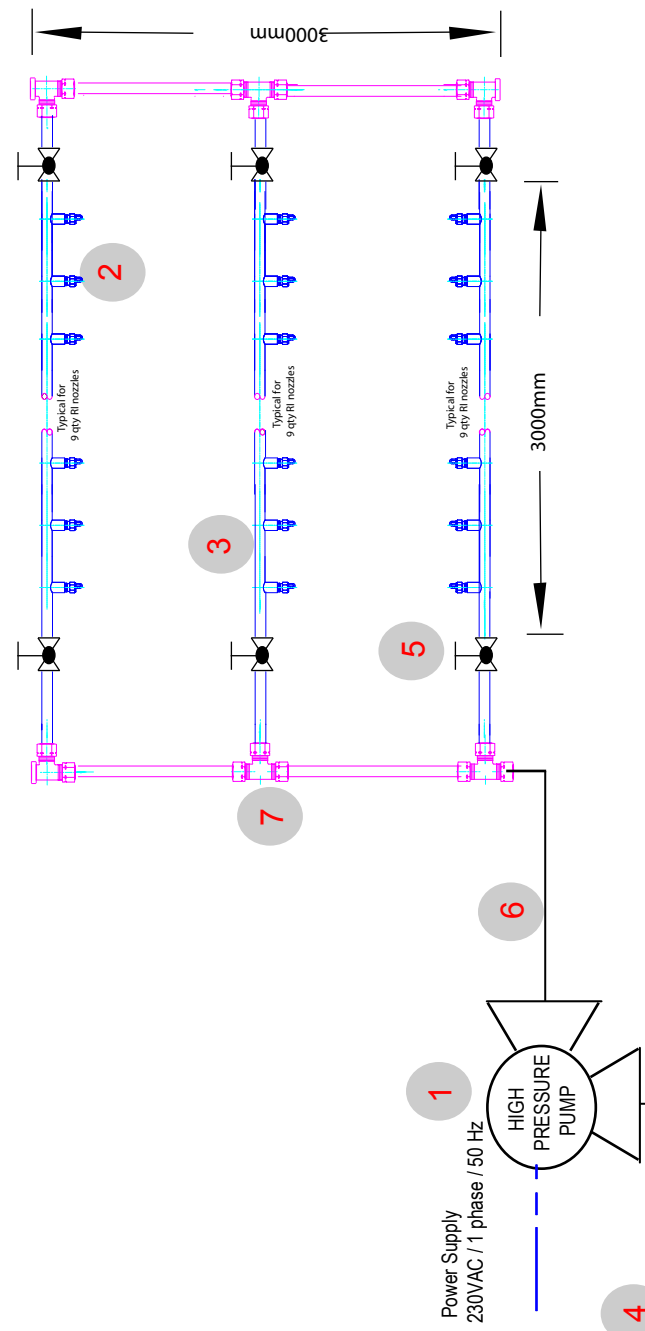

**Wilson Engineering (S) Pte Ltd**  
 Block 2021, #02-180 Bukit Batok Street 23,  
 Bukit Batok Industrial Park A, Singapore 659526

**TITLE**  
 3m x 3m DUST SUPPRESSION

---

**UNLESS OTHERWISE SPECIFIED:**  
 DIMENSIONS ARE IN INCHES  
 TOLERANCES            ANGULAR  
 FRACTIONS    DECIMALS    ± 1/16    ± 0.005    ± 1°  
 DECIMALS    ± 0.010    ± 0.010    ± 1°  
 INTERPRET PER ASME Y14.5M  
 DO NOT SCALE DRAWING IF NOT SPECIFIED

**MATERIAL**    FINISH    125 ✓

**ASSY**

www.wilsonspraynozzle.sg  
 E-mail : wilsonspraynozzle@gmail.com  
 Tel : 67741828  
 Fax : 67779813

---

<b>SIZE</b>	<b>DRAWN</b>	<b>DATE</b>	<b>DWG NO.</b>	<b>REV.</b>
B	VN	27/11/18	98770	0
<b>CHECKED</b>	<b>GT</b>	<b>DATE</b>	<b>FILE NAME:</b>	<b>JOB NO.</b>
		27/11/18		
<b>SCALE</b>	<b>1:2</b>	<b>SHEET</b>	<b>1</b>	<b>OF</b>
				<b>1</b>